

# LED ULTRAFLAT PANEL, RUND



## Produkt

### LED Ultraflat Panel


Leuchtenform	Rund
Lichtfarbe	3.000 K/4.000 K
Farbwiedergabe	≥80
Lebensdauer	40.000 h
Garantie	3 Jahre
Schutzklasse	IP40
Details	Eingangsspannung AC100 - 240V ~ 50/60 Hz

## Product

### LED Ultraflat Panel

Shape	Round
CCT	3.000 K/4.000 K
CRI	≥80
Lifetime	40.000 h
Warranty	3 years
Protection class	IP40
Details	Input voltage AC100 - 240V ~ 50/60 Hz

## Lichtverteilungskurve / Light distribution curve

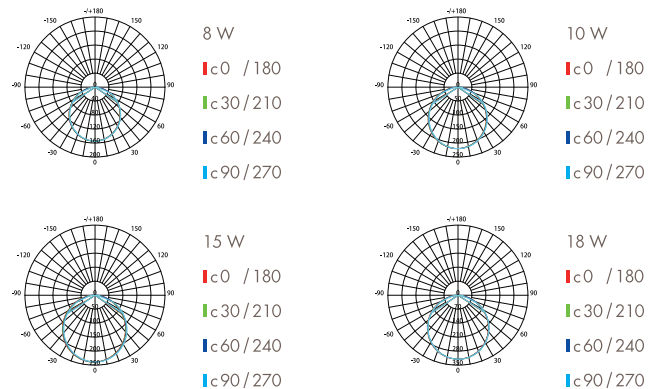

## Spezifikationen / Specifications

Art.-Nr. Art. no.	EAN EAN	Maße dimensions (mm)	Leistung power (Watt)	Lichtstrom luminous flux. (Lumen)	Lichtfarbe CCT (Kelvin)	Abstr. Winkel beam angle (Grad/degree)	Dimmbar dimmable	Deckenausschnitt cut-out (mm)
111009	4 250 849 100 799	ø145 x 14	8	480	3.000	120°	X	ø125
111010	4 250 849 100 805	ø145 x 14	8	490	4.000	120°	X	ø125
111011	4 250 849 100 812	ø180 x 14	10	650	3.000	120°	X	ø160
111012	4 250 849 100 829	ø180 x 14	10	750	4.000	120°	X	ø160
111013	4 250 849 100 836	ø240 x 14	15	900	3.000	120°	X	ø225
111014	4 250 849 100 843	ø240 x 14	15	950	4.000	120°	X	ø225
111015	4 250 849 100 850	ø300 x 14	18	1.250	3.000	120°	X	ø280
111016	4 250 849 100 867	ø300 x 14	18	1.400	4.000	120°	X	ø280