

LED ULTRAFLAT PANEL, QUADRATISCH



Extras

Art.-Nr. Art. no.	EAN EAN	Beschreibung description
011001	4 250 849 101 449	Seilaufhängung/suspension set
011039	4 250 849 103 110	Treiber 30 W/Driver 30 W
011028	4 250 849 102 809	Treiber dimmbar 30W/ Driver dimmable 30W
011028	4 250 849 102 809	Treiber 60 W/Driver 60 W
011029	4 250 849 102 816	Treiber dimmbar 60W/ Driver dimmable 60W
011040	4 250 849 103 127	Treiber 42 W/Driver 42 W

Produkt

LED Ultraflat Panel


Leuchtenform	Quadratisch
Lichtfarbe	3.000 K/4.000 K
Farbwiedergabe	≥80
Lebensdauer	40.000 h
Garantie	3 Jahre
Schutzklasse	IP40
Details	Eingangsspannung AC100 - 240V ~ 50/60 Hz

Product

LED Ultraflat Panel

Shape	Square
CCT	3.000K/4.000 K
CRI	≥80
Lifetime	40.000 h
Warranty	3 years
Protection class	IP40
Details	Input voltage AC100 - 240V ~ 50/60 Hz

Lichtverteilungskurve / Light distribution curve

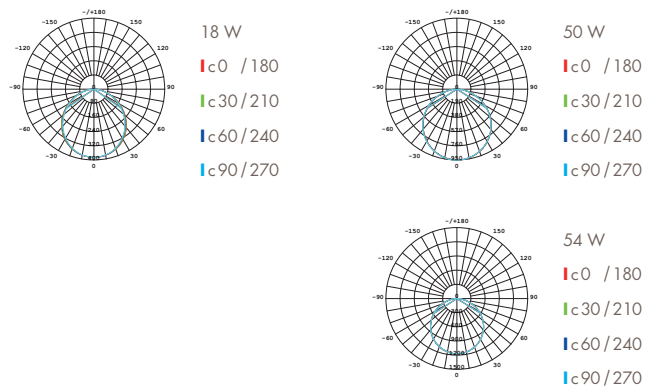

Spezifikationen / Specifications

Art.-Nr. Art. no.	EAN EAN	Maße dimensions (mm)	Leistung power (Watt)	Lichtstrom luminous flux. (Lumen)	Lichtfarbe CCT (Kelvin)	Abstr. Winkel beam angle (Grad/degree)	Dimmbar dimmable	Deckenausschnitt cutout (mm)
111001	4 250 849 100 591	300 x 300 x 8,5	18	1.480	3.000	120°	x	287 x 287
111002	4 250 849 100 607	300 x 300 x 8,5	18	1.600	4.000	120°	x	287 x 287
111007	4 250 849 100 775	595 x 595 x 8,5	50	4.050	3.000	120°	x	581 x 581
111008	4 250 849 100 782	595 x 595 x 8,5	50	4.280	4.000	120°	x	581 x 581
111003	4 250 849 100 614	620 x 620 x 8,5	54	4.050	3.000	120°	x	597 x 597
111004	4 250 849 100 621	620 x 620 x 8,5	54	4.280	4.000	120°	x	597 x 597