


LED UNIVERSAL-LEUCHE

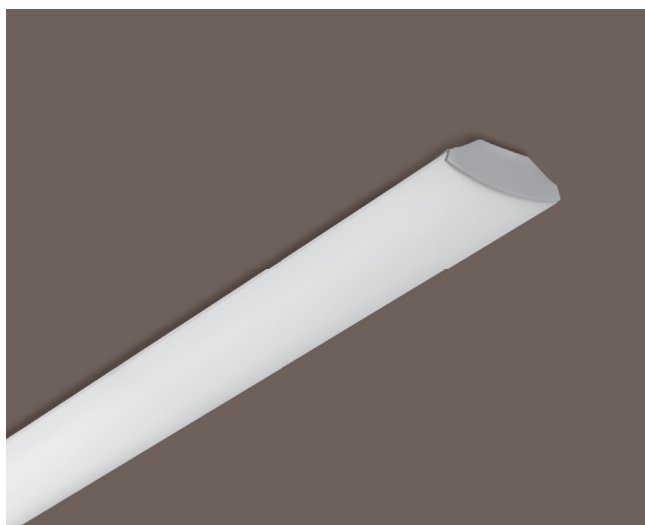

Extras

Art.-Nr. Art. no.	EAN EAN	Beschreibung description
011001	4 250 849 101 449	Seilaufhängung/suspension set

Produkt

LED Universal-Leuchte


Leuchtenform	Rechteckig
Lichtfarbe	3.000 K/4.000 K
Farbwiedergabe	≥80
Lebensdauer	35.000 h
Garantie	3 Jahre
Schutzklasse	IP20
Details	Eingangsspannung AC100 - 240V ~ 50/60 Hz

Product

LED Universal Light

Shape	Rectangle
CCT	4.000 K
CRI	≥80
Lifetime	35.000 h
Warranty	3 years
Protection class	IP20
Details	Input voltage AC100 - 240V ~ 50/60 Hz

Lichtverteilungskurve / Light distribution curve

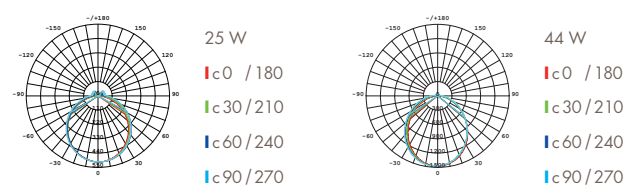

Spezifikationen / Specifications

Art.-Nr. Art. no.	EAN EAN	Maße dimensions (mm)	Leistung power (Watt)	Lichtstrom luminous flux. (Lumen)	Lichtfarbe CCT (Kelvin)	Abstr. Winkel beam angle (Grad/degree)	Dimmbar dimmmable
181012	4 250 849 101 178	626 x 140 x 50	25	1.650	3.000	120°	X
181013	4 250 849 101 185	626 x 140 x 50	25	1.800	4.000	120°	X
181014	4 250 849 101 192	1.235 x 140 x 50	44	3.000	3.000	120°	X
181015	4 250 849 101 208	1.235 x 140 x 50	44	3.200	4.000	120°	X
181024	4 250 849 101 581	1.535 x 140 x 50	55	3.700	3.000	120°	X
181025	4 250 849 101 598	1.535 x 140 x 50	55	4.000	4.000	120°	X